

TRACK LIGHTING



SECOND EDITION


JESCO
LIGHTING GROUP



JESCO's latest complete Track Lighting collection features **new COB LED track head designs** that employ advanced-design components for premium efficacy and even heat distribution for a long life. Track heads range in a wide array of wattages, lumen output and lamp sources to meet any design needs.

Our new LED track heads feature:

- An L70 lifespan of 50,000 hours and a 5 year warranty
- 3 Step MacAdam COB LEDs which eliminate the concerns of binning and color inconsistency issues found in the market in which 4 to 7 Step MacAdam LEDs are the norm
- Many of the fixtures employ our H2-, J2- and L2-type track adaptor making for an easy installation in either a Single or a Two Circuit track system.












The L516, L515 and L514/L524 offer field replaceable lenses that allow for the selection of specific beam angles as well as choices in color temperatures and CRI.

JESCO's newest H1, J1 and J2 track system is engineered and manufactured for the high demands of the retail and commercial markets yet also refined for upscale residential applications. Our system allows for the maximum design flexibility featuring a wide range of connectors and accessories.








Our new **Recessed Channel** track system offers a clean and minimalistic option when installed in drywall or T-bar type drop ceilings.

Our new **Current Limiters** allow for compliance options to meet the latest California Title 24 or ASHRAE 90.1 energy codes requirements.




Lastly, **new long-life LED lamps** for our line and low voltage track heads offer cost-effective options to greatly reduce energy consumption and maintenance costs.

LED	L516S pg. 4	L516M pg. 4	L516L pg. 4	L517 pg. 6	L519L pg. 7	L519S pg. 7	L621 pg. 8	L621H pg. 9	L611 pg. 10	L514B pg. 12	L524B pg. 12
											
Watts	18	27	49	30	62	31	12.5	16.5	9.6	21.5	43
Lumens*	1476	2403	3773	2468	4852	2438	1112	1372	830	1400	2800
Lm/Watts*	82	89	77	81	79	79	89	83	86	65	65
CCT	2700 3000 3500 4000	2700 3000 3500 4000	2700 3000 3500 4000	2700 3000 3500 4000	2700 3000 3500 4000	2700 3000 3500 4000	3000	3000	3000	2700 3000 3500 4000	3000
CRI	80+ 90+ 97	80+ 90+ 97	80+ 90+ 97	80+ 90+ 97	90+	90+	80+	80+	80+	80+ 93	80+ 93
Beam Options	•	•	•							•	•
Lens Accessory Options										•	•
3 Step MacAdam LED	•	•	•	•	•	•	•	•	•	•	•
ELV Dimmable	•	•	•	•	•	•	•	•	•	•	•
Triac Dimmable	•	•	•	•	•	•	•	•	•	•	•
2-Circuit Track Adapter	•	•	•	•	•	•	•	•	•		

* Measured at 3000K, 80 CRI

LINE VOLTAGE	HV303 page 15	HV210 page 16	HV220 page 16	HV230 page 17	HV238 page 17	HV610 page 18	HV650 page 18
							
Watts, max	150	50	50	75	250	50	250
Lamp Base	Medium	GU10	Medium	Medium	Medium	GU10	Medium
Lamp Type Recommended	PAR20 PAR30 PAR38	MR16	PAR20	PAR30	PAR38	MR16	PAR20 PAR30 PAR38
Accessory Shades/Collar	•						
Adjustable Socket Depth							•
Triac Dimmable*	•	•	•	•	•	•	•
Two Circuit Track Adapter	•	•	•	•	•	•	•

* Based on lamp selection.

LOW VOLTAGE	LV102 page 20	LV109 page 20	LV132 page 20
			
Watts, max	50	50	50
Lamp Base	GU5.3	GU5.3	GU5.3
Lamp Type Recommended	MR16	MR16	MR16
ELV dimmable	•	•	•

LED COMPATIBLE LAMP OPTIONS FOR LINE & LOW VOLTAGE HEADS

See page 29



IES files and detailed specsheets are available on the JESCO website



L516 S



L516 M



L516 L

FEATURES + BENEFITS

- High output COB LED
- Replaces up to a 70W Metal Halide fixture
- 3-step MacAdam LED for uniform color consistency among fixtures
- 2-circuit Track Adapter (see page 22 for details)
- Die Cast Construction
- Field changable optics
- No exposed wiring
- Powder coat paint

L516 S

LED	18W	1476 Lm	82 Lm/W	DIM
25°	40°	55°	90°	330°

Dims: 3 3/8" L x 2 3/4" Ø x 7 3/16" Ext

L516 M

LED	27W	2403 Lm	89 Lm/W	DIM
20°	25°	37°	90°	330°

Dims: 4 9/16" L x 3 5/8" Ø x 8 5/8" Ext

L516 L

LED	49W	3773 Lm	77 Lm/W	DIM
18°	42°	60°	90°	330°

Dims: 5 5/8" L x 4 13/16" Ø x 9 3/4" Ext

Power Factor: >0.9

Dimming: ELV, TRIAC

LED Life: 50,000 hr

Lumen data based on 3000K @80CRI

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
J2 - J Track ¹	L516 S	3080 - 3000K 80CRI	B - Black
H2 - H Track ²	L516 M	4080 - 4000K 80CRI	W - White
L2 - L Track ³	L516 L	2797 - 2700K 97CRI* 3097 - 3000K 97CRI* 2790 - 2700K 90CRI* 3090 - 3000K 90CRI* 4090 - 4000K 90CRI* 2780 - 2700K 80CRI* 3580 - 3500K 80CRI*	

Note: Reflector determines beam angle and must be selected. See page 5.

* Contact factory for details.

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.



J2 Compatible



H2 Compatible



L2 Compatible

See page 22

L516 REFLECTOR BEAM ANGLE SELECTOR

L516S BEAM ANGLE OPTIONS

RFL516S-SP	25° beam
RFL516S-FL	40° beam
RFL516S-WF	55° beam

L516M BEAM ANGLE OPTIONS

RFL516M-SP	20° beam
RFL516M-FL	25° beam
RFL516M-WF	37° beam

L516L BEAM ANGLE OPTIONS

RFL516L-SP	18° beam
RFL516L-FL	42° beam
RFL516L-WF	60° beam



L516S Reflector



L516M Reflector



L516L Reflector



Selectable Beam Reflectors



Heat sink engineered for exceptional thermal management



Universally aimable



3 step MacAdam COB LED



Shown with Optional Snoot



Shown with Optional Barn Door

L516 HIGH OUTPUT COB LED vs CERAMIC METAL HALIDE COMPARISON

	L516S 25°	L516M 25°	L516L 18°	CMH MR16 20W 25°	CMH PAR20 20W 25°	CMH PAR30L 39W 25°	CMH PAR38 70W 15°
System Power (W)	18	27	49	24	25	44	75
Initial Flux (Lm)				1,000	1,000	2,400	4,100
Mean Flux (Lm)	1,476	2,403	3,773	900	900	1,600	2,870
Efficacy (Lm/W)	82	89	77	42	40	55	55
CCT (K)	3000	3000	3000	3000	3000	3000	3000
Rated Life (Hrs)	50,000	50,000	50,000	12,000	12,000	10,000	12,500



Provides a full cut-off, reducing glare while achieving a more directional source of light

L516LSNT

Optional Snoot for L516L
Dims: 3 1/2" Ø x 2 1/2" H

L516MSNT

Optional Snoot for L516M
Dims: 2 5/8" Ø x 2" H

L516SSNT

Optional Snoot for L516S
Dims: 1 3/4" Ø x 1 5/8" H
Finish: **(B)** Black, **(W)** White
(Sold separately)



Creates a theatrical look and control spill light

BD125

Optional Barn Door for L516L
Fits 5" max opening.
Accepts 4 3/4" filters and/or louver.

BD90

Optional Barn Door for L516M
Fits 3 3/4" max opening.
Accepts 3 1/2" filters and/or louver.

BD072

Optional Barn Door for L516S
Fits 2 1/2" max opening.
Accepts 2 3/4" filters and/or louver.
Finish: Black
(Sold separately)



FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- Robust extruded aluminum housing
- Horizontal aim indicator every 15°
- Textured powder coat paint
- Custom designed concealed heatsink
- 2-circuit Track Adapter
- Built-in Clear Lens
- Provides a diffuse, uniform wall wash beam spread

L517

LED	120V AC	30W	2468 Lm*	81 Lm/W	DIM
WW	180°	350°	DRY	ETL	

Dims: 6 5/16" L x 2 3/4" W x 8 3/8" Ext

Power Factor: >0.9

Dimming: TRIAC, ELV



Custom designed concealed Heatsink



Shown with optional Visor (Sold separately)



Aim indicator every 15°



L517VIS
Optional Visor
(Sold separately)

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
	L517		
J2 - J1 or J2 Track ¹		2797 - 2700K 97CRI	B - Black
H2 - H1 or H2 Track ²		3097 - 3000K 97CRI	W - White
L2 - L1 or L2 Track ³		2790 - 2700K 90CRI	
		3090 - 3000K 90CRI	
		4090 - 4000K 90CRI	
		2780 - 2700K 80CRI	
		3080 - 3000K 80CRI	
		3580 - 3500K 80CRI	
		4080 - 4000K 80CRI	



J2 Compatible



H2 Compatible



L2 Compatible

See page 22

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.
² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.
³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

* Lumen data at 3000K, 80CRI
 Specifications subject to change without notice. See spec sheet or jescocolighting.com for more details.

FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- Robust extruded aluminum housing
- Horizontal aim indicator every 15°
- Textured powder coat paint
- Custom designed concealed heatsink
- 2-circuit Track Adapter with built-in on/off switch
- Built-in Matte Lens provides a diffuse, uniform wall wash beam spread

L519L

LED	120V AC	62W	4852 Lm*	79 Lm/W	DIM
-----	---------	-----	----------	---------	-----

WW	175°	DRY	ETL
----	------	-----	-----

Dims: 23 1/2" L x 3 3/4" W x 5" Ext.

Power Factor: >0.9

Dimming: TRIAC, ELV

L519S

LED	120V AC	31W	2438 Lm*	79 Lm/W	DIM
-----	---------	-----	----------	---------	-----

WW	175°	DRY	ETL
----	------	-----	-----

Dims: 14 7/8" L x 3 3/4" W x 5" Ext.

Power Factor: >0.9

Dimming: TRIAC, ELV



Built-In Matte Lens




Shown with optional Louver (Sold separately)



Aim indicator every 15°

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
J2 - J1 or J2 Track ¹	L519L - 23 1/2"L	2790 - 2700K 90CRI	B - Black
H2 - H1 or H2 Track ²	L519S - 14 7/8"L	3090 - 3000K 90CRI	W - White
L2 - L1 or L2 Track ³		3590 - 3500K 90CRI	
		4090 - 4000K 90CRI	



L519LLV
Optional Louver for L519L

L519SLV
Optional Louver for L519S
Finish: (B) Black, (W) White
(Sold separately)

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lighttolier Lytespan Track. Lighttolier is registered Trademark of Philips Lighting.

* Lumen data at 3000K, 90CRI

Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.



J2 Compatible



H2 Compatible



L2 Compatible

See page 22



FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- Injection molded polycarbonate driver housing
- Die-cast aluminum arm
- Extruded aluminum heatsink and LED housing
- Textured powder coat paint
- Custom designed concealed heatsink
- 2-circuit Track Adapter
- Built-in Clear Lens

L621

LED	120V AC	12.5W	1112 Lm	89 Lm/W	80+ CRI
DIM	38°	±90°	350°	DRY	ETL

Dims: 3 1/2" L x 2 7/16" Ø x 5 7/8" Ext

Power Factor: >0.9

Dimming: 10-100%, C.L



Custom designed heatsink



COB LED provides single light source with no light scalloping

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
	L621	3080	

J2 - J1 or J2 Track¹

H2 - H1 or H2 Track²

L2 - L1 or L2 Track³

3080 - 3000K 80CRI

B - Black

W - White



¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

* Lumen data at 3000K, 80CRI

Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.

FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- Injection molded polycarbonate driver housing
- Die-cast aluminum arm
- Extruded aluminum heatsink and LED housing
- Textured powder coat paint
- Custom designed concealed heatsink
- 2-circuit Track Adapter
- Built-in Clear Lens

L621H

LED	120V AC	16.5W	1372 Lm	83 Lm/W	80+ CRI
DIM	38°	±90°	350°	DRY	ETL

Dims: 4 1/2" L x 2 7/16" Ø x 6 7/8" Ext

Power Factor: >0.9

Dimming: 10-100%, C.L



Custom designed heatsink



COB LED provides single light source with no light scalloping

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
	L621H	3080	
J2 - J1 or J2 Track ¹ H2 - H1 or H2 Track ² L2 - L1 or L2 Track ³		3080 - 3000K 80CRI	B - Black W - White

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

* Lumen data at 3000K, 80CRI

Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.






FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- 2-circuit Track Adapter (see page 22 for details)
- Die-cast aluminum housing

L611



Dims: 4 5/8" L x 2 5/16" Ø x 7 1/8" Ext

Power Factor: >0.9

Dimming: 10-100%, ELV and TRIAC

Lumen data based on 3000K @80CRI



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

H2HVFE12
H2HVFE18
H2HVFE24
H2HVFE36
H2HVFE48
J2HVFE12
J2HVFE18
J2HVFE24
J2HVFE36
J2HVFE48



Line Voltage Rod Fixture Extender

Available in 14 1/2", 20 1/2",
26 1/2", 38 1/2" & 50 1/2"
Finish: BK, WH



J2 Compatible



H2 Compatible



L2 Compatible

See page 22

TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
	L611	3080	
J2 - J Track ¹		3080 - 3000K 80CRI	B - Black
H2 - H Track ²			W - White
L2 - L Track ³			

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

Specifications subject to change without notice.

See spec sheet or jescolighting.com for more details.





FEATURES + BENEFITS

- 3 step MacAdam LED for uniform color consistency among fixtures
- Die-cast aluminum construction
- Horizontal aim indicator every 15°
- Holds up to (2) MR16 size lenses with use of L5X4-MHS.
- Select required Inner Reflectors and either Front Cover or Media Holder (Sold separately)

L514B

LED	120V AC	21.5W	1400 Lm	65 Lm/W	DIM
16°	28°	42°	180° HEAD	240° HEAD	330° STEM

Dims: 3 3/8" L x 6 1/8" W x 13" Ext

Power Factor: >0.98

Dimming: ELV



L524B

LED	120V AC	43W	2800 Lm	65 Lm/W	DIM
16°	28°	42°	180° HEAD	240° HEAD	330° STEM

Dims: 3 3/8" L x 15" W x 13" Ext

Power Factor: >0.98

Dimming: ELV



TO ORDER

SYSTEM	MODEL	CCT/CRI	FINISH
J - J Track ¹	L514B	3080 - 3000K 80 CRI	S - Silver
H - H Track ²		4080 - 4000K 80 CRI	
L - L Track ³		2793 - 2700K 93 CRI*	
		3093 - 3000K 93 CRI*	
		3593 - 3500K 93 CRI*	
		2780 - 2700K 80 CRI*	
		3580 - 3500K 80 CRI*	
	L524B	3080 - 3000K 80 CRI	

Required Selections: Beam Reflectors and Front Covers.
Choose one per for each track head. Field changeable. See page 13.

* Contact factory for details.

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.

Specifications subject to change without notice.

See spec sheet or jescolighting.com for more details.

L514, L524 REQUIRED OPTIONS



REF-SN-L-C12476
16° Reflector



REF-SN-L-C12477
28° Reflector



REF-SN-L-C12478
42° Reflector




L5X4-FCS-CLEAR
Front Cover encasing with Clear Lens



L5X4-FCS-SOFT
Front Cover encasing with Solite™ Softening Lens



L5X4-MHS
Media Holder
For up to 2 Lens Accessories
See page 28

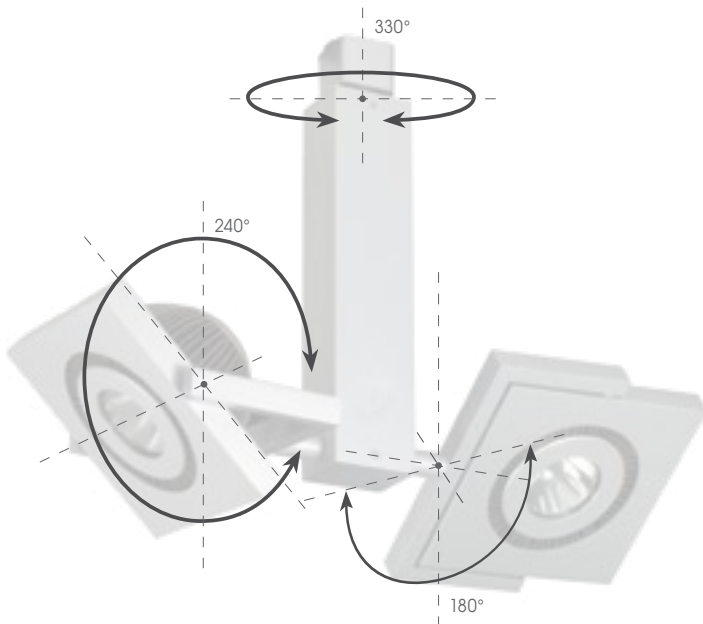

L514, L524 ACCESSORIES WITH USE OF L5X4-MHS



LENS-16-FROS
Frosted Diffuser



LENS-16-HCOM
Honeycomb Louver



LENS-16-PRIS
Prismatic Diffuser



LENS-16-SOFT
Softening Diffuser Solite



LENS-16-LINR
Linear Diffuser



LINE VOLTAGE LED COMPATIBLE TRACKHEADS

FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Universal
- Dimmable with standard Line Voltage Incandescent Dimmer*
- Select optional collar or shades to best fit lamp selected

HV303



Lamp/Wattage: PAR20/50W, PAR30/75W, PAR38/150W, 120V

Dims: 2 3/4" L x 2 1/4" Ø x 4 5/8" Ext

* Based on lamp selection.



Shown with LED PAR30S

HV303 ACCESSORIES



HV303C
Lamp Collar
2 3/8" Ø x 1 3/8" H



HV303P20
PAR20 Lamp Shade
3 1/2" Ø x 2 1/8" H



HV303P30
PAR30 Lamp Shade
4 3/4" Ø x 2 1/8" H



HV303P38
PAR38 Lamp Shade
6" Ø x 3 3/4" H



HV303 + PAR20



HV303 + PAR30



HV303+HV303P20+PAR20

TO ORDER

SYSTEM	- MODEL	- FINISH
<input type="text"/>	- HV303	- <input type="text"/>

J2 - J Track¹
H2 - H Track²
L2 - L Track³

BK - Black
WT - White

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.
² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.
³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.
Specifications subject to change without notice.
See spec sheet or jescolighting.com for more details.



LED Lamp
Compatible

See page 29



J2 Compatible



H2 Compatible



L2 Compatible

H2HVFE12
H2HVFE18
H2HVFE24
H2HVFE36
H2HVFE48

J2HVFE12
J2HVFE18
J2HVFE24
J2HVFE36
J2HVFE48



**Line Voltage Rod
Fixture Extender**
Available in 14 1/2", 20 1/2",
26 1/2", 38 1/2" & 50 1/2"
Finish: BK, WH

See page 22



FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Mini Gimbal
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV210



Lamp: MR16 GU10 120V

Wattage: 50W Max

Dims: 2 7/16" L x 2 1/8" Ø x 5 7/8" Ext

* Based on lamp selection.



FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Small Gimbal
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV220



Lamp: PAR20 120V

Wattage: 50W Max

Dims: 3 5/16" L x 3" Ø x 7 3/8" Ext

* Based on lamp selection.

H2HVFE12
H2HVFE18
H2HVFE24
H2HVFE36
H2HVFE48

J2HVFE12
J2HVFE18
J2HVFE24
J2HVFE36
J2HVFE48



Line Voltage Rod Fixture Extender

Available in 14 1/2", 20 1/2",
26 1/2", 38 1/2" & 50 1/2"
Finish: BK, WH



LED Lamp
Compatible

See page 29



J2 Compatible



H2 Compatible



L2 Compatible

See page 22

TO ORDER

SYSTEM	- MODEL	- FINISH

J2 - J Track¹
H2 - H Track²
L2 - L Track³

HV 210
HV 220

BK - Black
WT - White

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting. Specifications subject to change without notice.

See spec sheet or jescolighting.com for more details.

LINE VOLTAGE LED COMPATIBLE TRACKHEADS

FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Medium Gimbal
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV230




Lamp: PAR30 120V
Wattage: 75W Max
Dims: 3 1/4" L x 3 15/16" Ø x 7 7/16" Ext
 * Based on lamp selection.



FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Large Gimbal
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV238



Lamp: PAR38 120V
Wattage: 250W Max
Dims: 3 15/16" L x 5" Ø x 9 3/4" Ext
 * Based on lamp selection.



TO ORDER

SYSTEM	-	MODEL	-	FINISH
<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
J2 - J Track ¹		HV 230		BK - Black
H2 - H Track ²		HV 238		WT - White
L2 - L Track ³				

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.
² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.
³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting.
 Specifications subject to change without notice.
 See spec sheet or jescolighting.com for more details.



LED Lamp Compatible

See page 29



J2 Compatible



H2 Compatible



L2 Compatible

H2HVFE12
 H2HVFE18
 H2HVFE24
 H2HVFE36
 H2HVFE48

J2HVFE12
 J2HVFE18
 J2HVFE24
 J2HVFE36
 J2HVFE48



Line Voltage Rod Fixture Extender
 Available in 14 1/2", 20 1/2",
 26 1/2", 38 1/2" & 50 1/2"
 Finish: BK, WH

See page 22

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV610



Lamp: MR16 GU10 120V

Wattage: 50W Max

Dims: 4 3/16" L x 2 1/2" Ø x 7" Ext

* Based on lamp selection.



FEATURES + BENEFITS

- 2-circuit Track Adapter with on/off switch
- LED lamp compatible (see page 29)
- Adjustable Socket Depth
- Universal
- Dimmable with standard Line Voltage Incandescent Dimmer*

HV650



Lamp/Wattage: PAR20/50W Max, PAR30/75W Max,
PAR38/250W Max 120V

Dims: 4 1/2" L x 2" Ø x 8 1/4" Ext

* Based on lamp selection.



H2HVFE12
H2HVFE18
H2HVFE24
H2HVFE36
H2HVFE48

J2HVFE12
J2HVFE18
J2HVFE24
J2HVFE36
J2HVFE48



Line Voltage Rod Fixture Extender

Available in 14 1/2", 20 1/2",
26 1/2", 38 1/2" & 50 1/2"
Finish: BK, WH



LED Lamp Compatible

See page 29



J2 Compatible



H2 Compatible



L2 Compatible

See page 22

TO ORDER

SYSTEM	- MODEL	- FINISH

J2 - J Track¹
H2 - H Track²
L2 - L Track³

HV 610
HV 650

BK - Black
WT - White

¹ JESCO J, J1, J2 Track or Juno Track-Master. Juno is registered Trademark of Juno Lighting.

² JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting.

³ JESCO L Track or Lightolier Lytespan Track. Lightolier is registered Trademark of Philips Lighting. Specifications subject to change without notice.

See spec sheet or jescolighting.com for more details.

LINE VOLTAGE LED COMPATIBLE TRACKHEADS



TRACK LIGHTING LOW VOLTAGE TRACKHEADS



FEATURES + BENEFITS

- Die Cast Construction for LV102 & LV109
- To lower the trackhead, fixture can be extended with Rod Extender
- Dimmable with Electronic Low Voltage Dimmer
- Can hold one LENS-16 series lens (see page 28).

LV102



Lamp: MR16 GU5.3 12V
Wattage: 50W Max
Min Load: 20W
Dims: 3 3/16" L x 2 3/8" W x 5 7/8" Ext



LV109



Lamp: MR16 GU5.3 12V
Wattage: 50W Max
Min Load: 20W
Dims: 3 3/16" L x 2 3/8" Ø x 5 7/8" Ext



LV132



Lamp: MR16 GU5.3 12V
Wattage: 50W Max
Min Load: 20W
Dims: 5/8" L x 2 1/8" Ø x 4 7/8" Ext

- LVFE06
- LVFE12
- LVFE18
- LVFE24
- LVFE36
- LVFE48



Low Voltage Rod Fixture Extender
 Available in 8 1/2", 14 1/2", 20 1/2", 26 1/2", 38 1/2" & 50 1/2"
 Finish: BK, WH



H2 Compatible

See page 22

TO ORDER

SYSTEM	- MODEL	- FINISH
H2 - H Track ¹	LV 102 LV 109 LV 132	BK - Black WT - White

¹ JESCO H, H1 Track or Halo Power-Track. Halo is registered Trademark of Cooper Lighting. Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Track: L515
Shelves: S601
Backlighting: SG-LED
Hartmann Flagship Store
New York, NY
Millwork: Daniel DeMarco & Associates

JESCO's modular system of engineered, interlocking track and connectors allows for the maximum design flexibility for any retail, commercial or residential application, for either new construction or retrofit projects.

Made of extruded aluminum, our low-profile track forms the ultra-strong backbone of any system. Rigid whether surface mounted, recessed mounted or suspended from a ceiling. The track features thermoplastic insulators and three #12 AWG solid copper conductors.

The track is compatible with all our JESCO Single Circuit H and J track lighting fixtures, our Single and Two Circuit H2 and J2 track lighting fixtures as well as other brands.

Available in three styles – Single Circuit H1-type, Single Circuit J1-type, and Two Circuit J2-type.

The Two Circuit J2-type track allows for the application of two separate switches on a single run providing greater on/off or dimming control as well as design flexibility.


Power is easily fed to the track with either a standard End Feed, an End Feed with an Outlet Box Cover, an End Feed for Conduit or a T-Bar Feed. Connection possibilities are endless with choice of a mini I-Joiner, a flexible I-Joiner, an adjustable I- or L-Connector, a T-Connector or an X-Connector. Track can also be pendant mounted from the ceiling using Suspension Stems with lengths up to 48". Sloped ceilings are also accommodated with use of adaptors.

Designed for effortless installation and built to last, JESCO's track will meet or exceed your design needs.

TRACK SYSTEMS & ADAPTERS

TWO CIRCUIT ADAPTERS

Select JESCO J2-, H2- & L2-type track heads

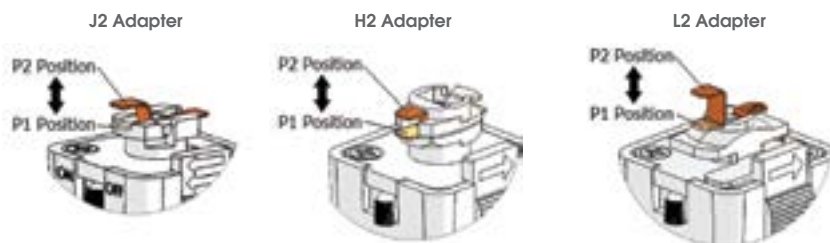

P1 = Lowered position. Single circuit track or circuit #1 of two circuit track. (Factory setting)
 P2 = Raised position. Circuit #2 of a two circuit track.

Our newest track heads feature adapters that allow for easy installation into either a single circuit or two circuit track system.

By simply adjusting the position of the metal tab on the adapter up or down, prior to insertion, you can select which circuit the fixture will be powered on.

















The J2/H2/L2 two circuit adapter is incorporated onto the following track heads: L516, L611, HV210, HV220, HV230, HV238, HV303, HV610, HV650.

TRACK SYSTEMS

	Description	Model	Dims	Finish	Features
	2' J1 Single Circuit Track 4' J1 Single Circuit Track 6' J1 Single Circuit Track 8' J1 Single Circuit Track	J1TR2 J1TR4 J1TR6 J1TR8	1 1/8" H x 1 7/8" W	BK, WT	<ul style="list-style-type: none"> Extruded aluminum Thermoplastic insulators & #12 AWG copper conductors Ships with one J1EC end cap installed Surface mount to finished ceiling. Toggle bolts included Recessed mount using appropriate JRC recessed channel and accessories.
	4' J2 Two Circuit Track 8' J2 Two Circuit Track	J2TR4 J2TR8	1 3/8" H x 1 3/8" W	BK, WT	<ul style="list-style-type: none"> Extruded aluminum Thermoplastic insulators & #12 AWG copper conductors Single or Two Circuit track wiring Ships with one J2EC end cap installed Surface mount to finished ceiling. Toggle bolts included Recessed mount using appropriate JRC recessed channel and accessories
	2' H1 Single Circuit Track 4' H1 Single Circuit Track 6' H1 Single Circuit Track 8' H1 Single Circuit Track	H1TR2 H1TR4 H1TR6 H1TR8	1 1/8" H x 1 7/8" W	BK, WT	<ul style="list-style-type: none"> Extruded aluminum Thermoplastic insulators & #12 AWG copper conductors Tracks are supplied with one H1EC end cap installed Surface mount to finished ceiling. Toggle bolts included










WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TRACK COMPONENTS & CONNECTORS

	Description	J1 Single Circuit Track	J2 Two Circuit Track	H1 Single Circuit Track	Finish
	Track Live End Reversed polarity available upon request	J1LE J1LER - Reversed polarity 4 7/8" L x 1 7/16" W x 3/4" H	J2LE J2LER - Reversed polarity 4 3/4" L x 1 7/8" W x 13/16" H	H1LE H1LER - Reversed polarity 4 1/4" L x 1 7/16" W x 3/4" H	BK, WT
	Track Live End with Outlet Box Cover Reversed polarity available upon request	J1LEC J1LECR - Reversed polarity 5 11/16" L x 4 1/4" W x 3/4" H	J2LEC J2LECR - Reversed polarity 5 1/16" L x 4" W	H1LEC H1LECR - Reversed polarity 5 11/16" L x 4 1/4" W x 3/4" H	BK, WT
	Track Conduit End Feed Reversed polarity available upon request	J1LEBX J1LEBXR - Reversed polarity 6 3/8" L x 1 7/16" W x 1 7/16" H	J2LEBX J2LEBXR - Reversed polarity 6 3/8" L x 1 7/16" W x 1 7/16" H	H1LEBX H1LEBXR - Reversed polarity 5 3/4" L x 1 7/16" W x 1 3/16" H	BK, WT
	Track Floating Canopy	J1FC 4 5/8" L x 4 5/8" W x 1 3/8" H	N/A	H1FC 4 1/4" H x 4 1/4" W x 1 3/8" H	BK, WT
	Track Mini I Joiner	J1IJ 3 1/2" L x 3/8" W x 11/16" H	J2IJ 3 5/16" L x 1 3/8" W x 3/4" H	H1IJ 3 1/8" L x 1 7/16" W x 11/16" H	BK, WT
	Track Adjustable I or L Connector / Feed	J1ILP 7 1/16" L x 1 7/16" W x 3/4" H 4 3/8" H x 4 3/8" W x 3/4" H	J2ILP 7" L x 1 7/16" W x 13/16" H 4 1/4" H x 4 1/4" W x 13/16" H	H1ILP 7" L x 1 7/16" W x 3/4" H 4 1/4" L x 4 1/4" W x 3/4" H	BK, WT
	Track T Connector / Feed	J1TP 7 7/16" L x 4 3/8" W x 13/16" H	J2TP 7" L x 4 1/4" W x 13/16" H	H1TP 7" L x 4 1/4" W x 3/4" H	BK, WT
	Track X Connector / Feed	J1XP 7 7/16" L x 7 7/16" W x 13/16" H	J2XP 7" L x 7" W x 13/16" H	H1XP 7" L x 7" W x 3/4" H	BK, WT
	Track Flexible Joiner	J1FLXJ 9 1/4" L x 1 7/16" W x 13/16" H	J2FLXJ 8 3/8" L x 1 7/16" W x 13/16" H	H1FLXJ 10 5/16" L x 1 7/16" W x 3/4" H	BK, WT
	Track T-Bar Outlet Box Housing	N/A	N/A	H1TBH 4 1/4" L x 4 1/4" W x 1 3/16" H	WT
	T-Bar End Feed Reversed polarity available upon request	J1TBLE J1TBLE - Reversed polarity 5 3/4" L x 4 3/16" W x 15/16" H	J2TBLE J2TBLE - Reversed polarity 5 5/8" L x 4 1/8" W x 15/16" H	N/A	WT
	T-Bar Adjustable I or L Connector/Feed	J1TBP 5 3/4" L x 5 3/4" W x 15/16" H	J2TBP 5 5/8" L x 4 1/8" W x 15/16" H	N/A	WT
	T-Bar Attachment Clip 1 5/8" L x 1 1/8" W x 15/16" H	TBC	TBC	TBC	
	Outlet Box Cover 5" L x 5" W	CP1	CP1	CP1	BK, WT
	Track End Cap	J1EC 7/16" W x 11/16" H x 9/16" D	J2EC 1 7/16" W x 13/16" H x 1/2" D	H1EC 1 7/16" W x 11/16" H x 1/2" D	BK, WT
	Adaptor Contact Support	N/A	J2AD1C 1/2" W x 7/16" H x 1/4" D	N/A	BK


TRACK SYSTEMS SUSPENSIONS

TRACK SUSPENSIONS

	Description	J1 Single Circuit Track	J2 Two Circuit Track	H1 Single Circuit Track	Finish
	Wireway Cover for Suspension	JSK102 9 7/16" L	JSK102 9 7/16" L	HSK102 8 1/8" L	BK, WT
	Suspension Canopy	JSK100 4 3/4" Ø	JSK100 4 3/4" Ø	HSK100 5" Ø	BK, WT
	Cable Suspension with Powerfeed	J1CS048P Canopy: 5"Ø x 1/4" H Length: 48" max.	J2CS048P Canopy: 5"Ø x 1/4" H Length: 48" max.	H1CS048P Canopy: 5"Ø x 1/4" H Length: 48" max.	BK, WT
	Cable Suspension	JCS048 Length: 48" max.	JCS048 Length: 48" max.	HCS048 Length: 48" max.	BK, WT
	6" Suspension Stem 12" Suspension Stem 18" Suspension Stem 24" Suspension Stem 36" Suspension Stem 48" Suspension Stem 1/2" Ø	SK106 SK112 SK118 SK124 SK136 SK148	SK106 SK112 SK118 SK124 SK136 SK148	SK106 SK112 SK118 SK124 SK136 SK148	BK, WT
	Sloped Ceiling Suspension Adaptor 4 7/8" L	SK101	SK101	SK101	BK, WT
	Suspension Stem Coupling 1 1/8" Ø x 1 3/16" L	SK100	SK100	SK100	BK, WT
	Monopoint Canopy 4 5/8" W x 4 5/8" L x 1/2" H			H1MP	BK, WT
	Monopoint Canopy 4 1/2" Ø x 3/4" H	J1MP			BK, WT





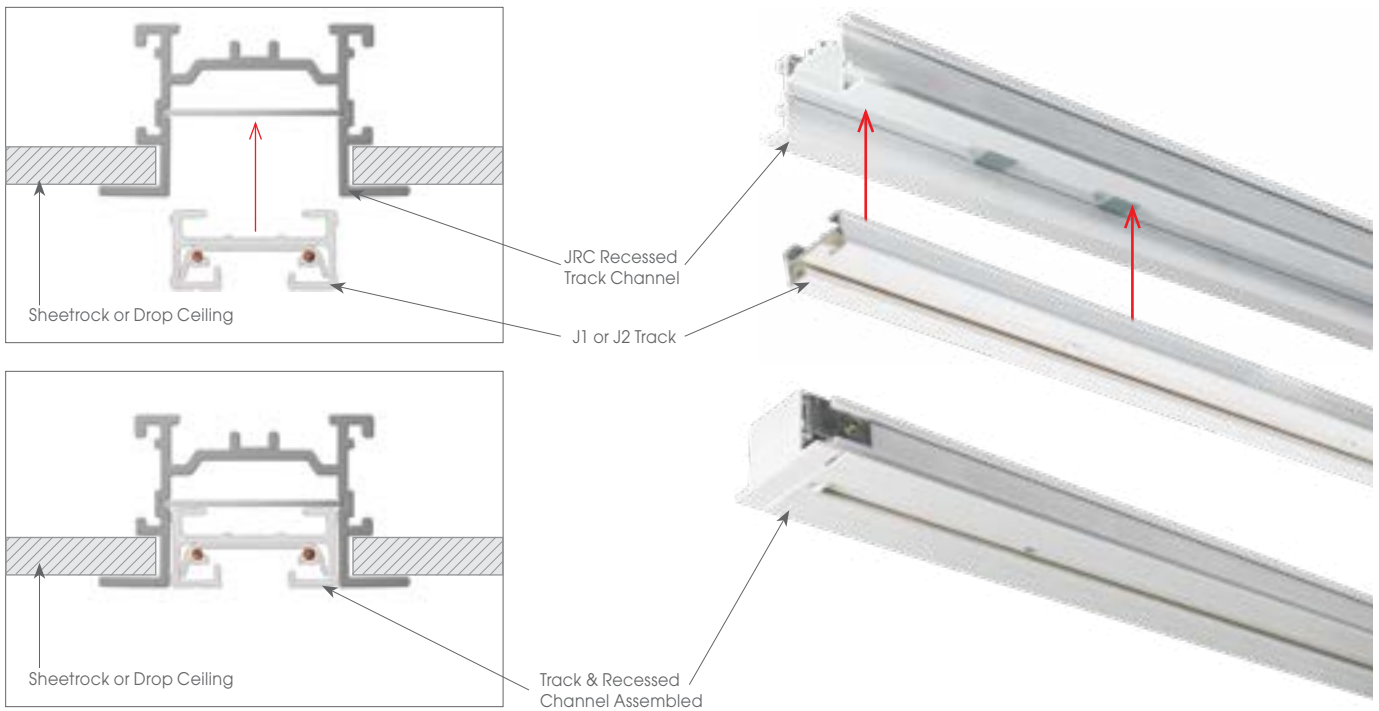



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

RECESSED TRACK CHANNELS



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

RECESSED TRACK CHANNELS FOR J1 & J2 TRACKS

	Description	J1, J2 Track	Finish
	4' Recessed Channel	JRC4	WT
	8' Recessed Channel 2 1/8" W x 1 1/2" H	JRC8	WT
	Recessed Housing for End Feed 5 1/2" L x 2 1/8" W x 1 1/2" H	JRCLE	WT
	Recessed Housing for I Connector / Feed 7 3/4" L x 2 1/8" W x 1 1/2" H	JRCIP	WT
	Recessed Housing for L Connector / Feed 4 15/16" L x 4 15/16" W x 1 1/2" H	JRCLEP	WT
	Recessed Housing for T Connector / Feed 7 3/4" L x 4 15/16" W x 1 1/2" H	JRCTP	WT
	Recessed Housing for X Connector / Feed 7 3/4" L x 7 3/4" W x 1 1/2" H	JRCXP	WT
	End Cap for Recessed Channel 1 1/2" L x 2 1/8" W x 5/8" H	JRCEC	WT

For applications that call for a more minimal profile we offer Recessed Flush Channels.

The Recessed Channels, in 4 and 8 foot lengths, can be installed in standard sheetrock or T-bar type drop ceilings.

JESCO J1 Single or J2 Two Circuit track easily fit into the Recessed Channel providing an almost invisible flush-to-ceiling profile.

Made of heavy gauge aluminum and machined steel connectors for rigidity and easy, snap together installation.

The recessed system offers a recessed End Feed (JRCLE) and End Cap (JRCEC) for simple linear runs or recessed I-, L-, T- or X-Connectors/Feeds for complex configurations.

JESCO J, J2 or similar J-type compatible track fixtures easily twist and snap into place to finish the clean look.



CLM

Mini Current Limiter

H1 Dims: 6.65" L x 1.97" W x 1.22" H
J1 Dims: 6.5" L x 1.99" W x 1.22" H

CLM-T24

Mini Current Limiter CA Title 24 Compliant

H1 Dims: 18.65" L x 1.97" W x 1.22" H
J1 Dims: 18.5" L x 1.99" W x 1.22" H



CLI

Inline Feed Current Limiter

H1 Dims: 7.8" L x 5.18" W x 1.19" H
J1 Dims: 8.14" L x 5.18" W x 1.2" H
J2 Dims: 7.74" L x 5.17" W x 1.2" H

CLI-T24

Inline Feed Current Limiter CA Title 24 Compliant

H1 Dims: 31.8" L x 5.18" W x 1.19" H
J1 Dims: 32.14" L x 5.18" W x 1.2" H
J2 Dims: 31.74" L x 5.17" W x 1.2" H



CLE

End Feed Current Limiter

H1 Dims: 6.35" L x 5.17" W x 1.19" H
J1 Dims: 6.56" L x 5.22" W x 1.2" H
J2 Dims: 6.35" L x 5.17" W x 1.2" H

CLE-T24

End Feed Current Limiter CA Title 24 Compliant

H1 Dims: 18.35" L x 5.17" W x 1.19" H
J1 Dims: 18.56" L x 5.22" W x 1.2" H
J2 Dims: 18.35" L x 5.17" W x 1.2" H

CURRENT LIMITERS

Current Limiters impose an upper limit of load allowed on a track system in order to conform to California Title 24 or local ASHRAE 90.1 requirements.

- Circuit breakers are installed in our factory eliminating extra labor at the job site.
- JESCO's current limiters are available for JESCO Single or Two Circuit track.
- Once installed the circuit limiter will render the track useless if it and the current limiter are separated.
- If tripped due to overlamping, the circuit breaker is easily reset.
- Switches may be used for local on/off control.

Most local energy codes limit the watts allowed for a project. Standard tracks are rated at their maximum by using the local multiplier (California electrical code specifies 45 watts/foot, for example) and multiplying that with the length of the track regardless of the true lamp load designed and specified by the lighting designer. This maximum calculation normally greatly exceeds the specified load since there is a possibility that the track can be overloaded with more fixtures at a later date surpassing the designed lamp load.

Today's lower wattage LED track heads mean that much lower load levels are possible.

A current limiter attached to a JESCO track system removes the calculated and inflated watts/foot penalty and instead allows you to select circuit breakers to lock in the designed maximum load and use the unused and very valuable watts elsewhere in your project.

Select one of seven wattage/ampere options for the circuit breakers to best meet your design needs.


The Mini Current Limiter (CLM/CLM-T24) allows for one breaker which controls a single track run.

The Inline Feed Current Limiter (CLI/CLI-T24) allows for one or two breakers which control either a single track run or two separate track runs.

The End Feed Current Limiter (CLE/CLE-T24) allows for one or two breakers which control either a single track run or a Two Circuit J2 track run.

Current limiters meeting California's Title 24 code are denoted with a "T24" at the end of the part number and are shipped with 12" of track permanently attached to the current limiter with tamper-proof screws.

Note: In order to connect a Title 24 approved current limiter with a section of track, a Joiner or Connector Feed must be selected (sold separately).

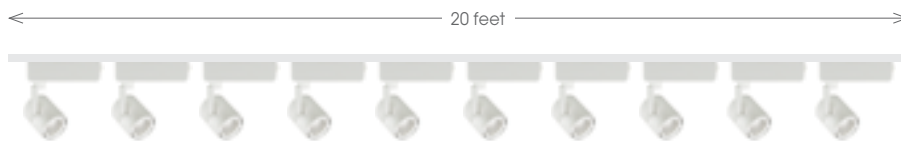

Without Current Limiter

Calculated based on California Title 24 Code 2013


Track Run: 20'
Power Linear Foot: 45W
Total Input: 20' x 45W = 900W

With Current Limiter

Calculated based on JESCO Track Head L516S


- Track Run: 20' with 10 fixtures
Power per Fixture: 18W
Total Input: 20' x 18W = 180W
The next closest breaker option is 240W 2A, therefore, the input Registration for this installation is 240W.
- If design needs change in the future, this track run has the ability to expand (240W-180W) up to 60W or 3 more track heads (60W / 18W = 3).
- By selecting the 240W Current Limiter Breaker, the savings is 900W - 240W = 660W. The 660W saved can be used elsewhere in the project.



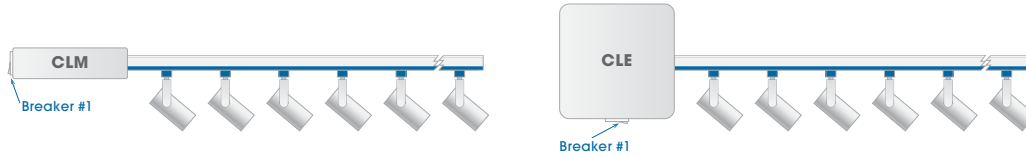


TO ORDER - SINGLE CIRCUIT CLM OR CLE STYLE

SYSTEM	HOUSING STYLE	BREAKER	FINISH
<input type="text"/> H1 - H Track System J1 - J Track System	<input type="text"/> CLM - Mini CLM-T24 - Mini (Title 24) CLE - End Feed CLE-T24 - End Feed (Title 24)	<input type="text"/> 0060 - 60W, 0.5A 0120 - 120W, 1A 0240 - 240W, 2A 0360 - 360W, 3A 0480 - 480W, 4A 0600 - 600W, 5A 1200 - 1200W, 10A	<input type="text"/> BK - Black WT - White

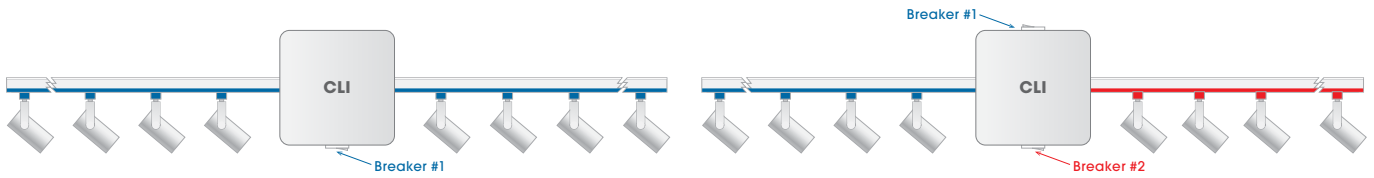

TO ORDER - SINGLE OR TWO CIRCUIT CLI STYLE

TRACK SYSTEM	HOUSING STYLE	BREAKER 1	BREAKER 2	FINISH
<input type="text"/> H1 - H Track System J1 - J Track System	<input type="text"/> CLI - Inline Feed CLI-T24 - Inline Feed (Title 24)	<input type="text"/> 0060 - 60W, 0.5A 0120 - 120W, 1A 0240 - 240W, 2A 0360 - 360W, 3A 0480 - 480W, 4A 0600 - 600W, 5A 1200 - 1200W, 10A	<input type="text"/> 0000 - No Breaker 0060 - 60W, 0.5A 0120 - 120W, 1A 0240 - 240W, 2A 0360 - 360W, 3A 0480 - 480W, 4A 0600 - 600W, 5A 1200 - 1200W, 10A	<input type="text"/> BK - Black WT - White

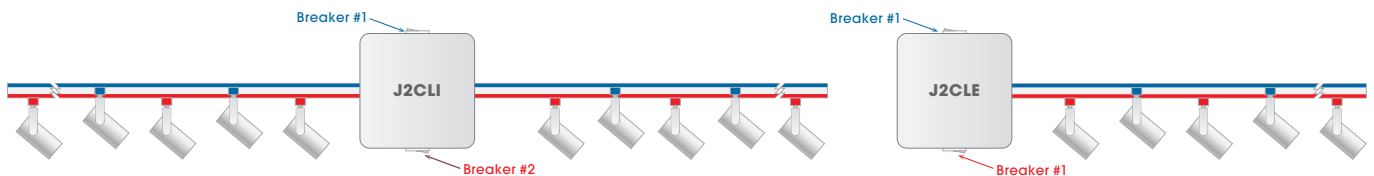

TO ORDER - TWO CIRCUIT CLE OR CLI STYLE

TRACK SYSTEM	HOUSING STYLE	BREAKER 1	BREAKER 2	FINISH
<input type="text"/> J2 - J Track System	<input type="text"/> CLE - End Feed CLE-T24 - End Feed (Title 24) CLI - Inline Feed CLI-T24 - Inline Feed (Title 24)	<input type="text"/> 0060 - 60W, 0.5A 0120 - 120W, 1A 0240 - 240W, 2A 0360 - 360W, 3A 0480 - 480W, 4A 0600 - 600W, 5A 1200 - 1200W, 10A	<input type="text"/> 0060 - 60W, 0.5A 0120 - 120W, 1A 0240 - 240W, 2A 0360 - 360W, 3A 0480 - 480W, 4A 0600 - 600W, 5A 1200 - 1200W, 10A	<input type="text"/> BK - Black WT - White

Note: when specifying dual breaker limiter please list the lowest wattage first.
 Specifications subject to change without notice. See spec sheet or jescolighting.com for more details.





TRACK LIGHTING MR16 LENSES & LOUVERS



Accessory Lens
LENS-16-FROS - Frosted Diffuser
LENS-16-HCOM - Honeycomb Louver
LENS-16-PRIS - Prismatic Diffuser
LENS-16-SOFT - Softening Diffuser
LENS-16-LINR - Linear Diffuser
LENS-16-UV - UV Filter



Colored Lens
LENS-16-RD - Red
LENS-16-BU - Blue
LENS-16-YW - Yellow
LENS-16-GN - Green



Dichroic Lens
LENS-16-DI-RD - Red
LENS-16-DI-BU - Blue
LENS-16-DI-YW - Yellow
LENS-16-DI-GN - Green



JESCO LED lamps offer a cost-effective alternative to standard incandescent and halogen sources. These long-life LED lamps are produced to last 25,000 hours, provide high light output, consume very little energy and greatly reduce maintenance costs. Each lamp has been tested and, subsequently, listed by Energy Star, UL and the FCC.



LL-MR16-6W-38-2780
LL-MR16-6W-38-3080
LL-MR16-6W-38-4080
LED 12V GU5.3 MR16 LAMP
 LED: COB LED
 Input: 12V AC/DC
 Watt: 6W (40W equivalent)
 Base: GU5.3
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 450 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 1.89" H



LL-MR16-7HW-40-2780
LL-MR16-7HW-40-3080
LL-MR16-7HW-40-4080
LED 12V GU5.3 MR16 LAMP
 Input: 12V AC/DC
 Watt: 7.5W (50W equivalent)
 Base: GU5.3
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 650 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 1.89" H



LL-MR16GU10-6W-38-2780
LL-MR16GU10-6W-38-3080
LL-MR16GU10-6W-38-4080
LED 120V AC GU10 MR16 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 6W (40W equivalent)
 Base: GU10
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 450 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 2.20" H



LL-MR16GU10-7HW-40-2780
LL-MR16GU10-7HW-40-3080
LL-MR16GU10-7HW-40-4080
LED 120V AC GU10 MR16 LAMP
 Input: 120V AC
 Watt: 7.5W (50W equivalent)
 Base: GU10
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 650 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 2.20" H



LL-P20-7W-36-2780
LL-P20-7W-36-3080
LL-P20-7W-36-4080
LED 120V AC PAR20 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 7W (50W equivalent)
 Base: Medium
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 550 Lm @3000K
 Dimming: ELV
 Dims: 2.52" Ø x 3.43" H



LL-BR20-7W-100-2780
LL-BR20-7W-100-3080
LL-BR20-7W-100-4080
LED 120V AC BR20 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 7W (50W equivalent)
 Base: Medium
 Beam: 100°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 550 Lm @3000K
 Dimming: ELV
 Dims: 2.48" Ø x 3.42" H



LL-P30-12W-40-2780
LL-P30-12W-40-3080
LL-P30-12W-40-4080
LED 120V AC PAR30 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 12W (75W equivalent)
 Base: Medium
 Beam: 40°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 950 Lm @3000K
 Dimming: ELV
 Dims: 3.78" Ø x 4.61" H



LL-BR30-12W-100-2780
LL-BR30-12W-100-3080
LL-BR30-12W-100-4080
LED 120V AC BR30 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 12W (75W equivalent)
 Base: Medium
 Beam: 100°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 1000 Lm @3000K
 Dimming: ELV
 Dims: 3.78" Ø x 4.64" H



LL-P38-16W-40-2780
LL-P38-16W-40-3080
LL-P38-16W-40-4080
LED 120V AC PAR38 LAMP
 LED: COB LED
 Input: 120V AC
 Watt: 16W (100W equivalent)
 Base: Medium
 Beam: 40°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 1250 Lm @3000K
 Dimming: ELV
 Dims: 4.80" Ø x 5.15" H

Contact us for other Color Temperatures or CRI options.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

B			
BD072	5		
BD90	5		
BD125	5		
C			
CLE	26		
CLE-T24	26		
CLI	26		
CLI-T24	26		
CLM	26		
CLM-T24	26		
CPI	23		
H			
H1CS048P	24		
H1EC	23		
H1FC	23		
H1IJ	23		
H1ILP	23		
H1LE	23		
H1LEBX	23		
H1LEBXR	23		
H1LEC	23		
H1LECR	23		
H1LER	23		
H1MP	24		
H1TBH	23		
H1TP	23		
H1TR2	22		
H1TR4	22		
H1TR6	22		
H1TR8	22		
H1XP	23		
H2HVFE12	10, 15, 16, 17, 18		
H2HVFE18	10, 15, 16, 17, 18		
H2HVFE24	10, 15, 16, 17, 18		
H2HVFE36	10, 15, 16, 17, 18		
H2HVFE48	10, 15, 16, 17, 18		
HCS048	24		
HSK100	24		
HSK102	24		
HV210	16		
HV220	16		
HV230	17		
HV238	17		
HV303	15		
HV303C	15		
HV303P20	15		
HV303P30	15		
HV303P38	15		
HV610	18		
HV650	18		
J			
J1CS048P	24		
J1EC	23		
J1FC	23		
J1FLXJ	23		
J1ILP	23		
J1LE	23		
J1LEBX	23		
J1LEBXR	23		
J1LEC	23		
J1LECR	23		
J1LER	23		
J1MP	24		
J1TBLE	23		
J1TBLER	23		
J1TBP	23		
J1TP	23		
J1TR2	22		
J1TR4	22		
J1TR6	22		
J1TR8	22		
J1XP	23		
J2AD1C	23		
J2CS048P	24		
J2EC	23		
J2FC	23		
J2FLXJ	23		
J2HVFE12	10, 15, 16, 17, 18		
J2HVFE18	10, 15, 16, 17, 18		
J2HVFE24	10, 15, 16, 17, 18		
J2HVFE36	10, 15, 16, 17, 18		
J2HVFE48	10, 15, 16, 17, 18		
J2ILP	23		
J2LE	23		
J2LEBXR	23		
J2LEC	23		
J2LECR	23		
J2LER	23		
J2TBLER	23		
J2TP	23		
J2TR4	22		
J2XP	23		
JCS048	24		
JRC4	25		
JRC8	25		
JRCEC	25		
JRCIP	25		
JRCLE	25		
JRCLP	25		
JRCTP	25		
JRCXP	25		
JSK100	24		
JSK102	24		
L			
L5X4-FCS-CLEAR	13		
L5X4-FCS-SOFT	13		
L5X4-MHS	13		
L514B	12		
L516L	4		
L516LSNT	5		
L516M	4		
L516MSNT	5		
L516S	4		
L516SSNT	5		
L517	6		
L517VIS	6		
L519L	7		
L519LLV	7		
L519S	7		
L519SLV	7		
L524B	12		
L611	10		
L621	8		
L621H	9		
LENS-16-BU	28		
LENS-16-DI-BU	28		
LENS-16-DI-GN	28		
LENS-16-DI-RD	28		
LENS-16-DI-YW	28		
LENS-16-FROS	13, 28		
LENS-16-GN	28		
LENS-16-HCOM	13, 28		
LENS-16-LINR	13, 28		
LENS-16-PRIS	13, 28		
LENS-16-RD	28		
LENS-16-SOFT	13, 28		
LENS-16-YW	28		
LL-BR20-7W-100-2780	29		
LL-BR20-7W-100-3080	29		
LL-BR20-7W-100-4080	29		
LL-BR30-12W-100-2780	29		
LL-BR30-12W-100-3080	29		
LL-BR30-12W-100-4080	29		
LL-MR16-6W-38-2780	29		
LL-MR16-6W-38-3080	29		
LL-MR16-6W-38-4080	29		
LL-MR16-7HW-40-2780	29		
LL-MR16-7HW-40-3080	29		
LL-MR16-7HW-40-4080	29		
LL-MR16GU10-6W-38-2780	29		
LL-MR16GU10-6W-38-3080	29		

LL-MR16GU10-6W-38-4080	29
LL-MR16GU10-7HW-40-2780	29
LL-MR16GU10-7HW-40-3080	29
LL-MR16GU10-7HW-40-4080	29
LL-P20-7W-36-2780	29
LL-P20-7W-36-3080	29
LL-P20-7W-36-4080	29
LL-P30-12W-40-2780	29
LL-P30-12W-40-3080	29
LL-P30-12W-40-4080	29
LL-P38-16W-40-2780	29
LL-P38-16W-40-3080	29
LL-P38-16W-40-4080	29
LV102	20
LV109	20
LV132	20
LVFE06	20
LVFE12	20
LVFE18	20
LVFE24	20
LVFE36	20
LVFE48	20

R

REF-SN-L-C12476	13
REF-SN-L-C12477	13
REF-SN-L-C12478	13
RFL516L-FL	5
RFL516L-SP	5
RFL516L-WF	5
RFL516M-FL	5
RFL516M-SP	5
RFL516M-WF	5
RFL516S-FL	5
RFL516S-SP	5
RFL516S-WF	5

S

SK100	24
SK101	24
SK106	24
SK112	24
SK118	24
SK124	24
SK136	24
SK148	24

T

TBC	23
-----	----



**NEW YORK
CORPORATE OFFICE**

15 Harbor Park Drive
Port Washington NY 11050
TEL 800 527 7796
FAX 855 265 5768

**LOS ANGELES
219 South 6th Avenue
City of Industry CA 91746**

TEL 626 333 3661
TEL 855 654 0110
FAX 626 333 2955

**DALLAS SHOWROOM
Dallas Trade Mart
Showroom TM 4313**

2100 N. Stemmons Freeway
Dallas TX 75207

JESCOLIGHTING.COM
info@jescolighting.com



For more details and product specifications please visit JESCOLIGHTING.COM

